



discus m

RGBW_{quad}

TECHNICAL DATASHEET

discus m

RGBWquad

Technical Data

Fixture Typ



RGBWquad

Color Temperatures W-Channel

4000 K, 6500 K

Beam Angles

10°, 22°, 34°, 60°, 8° x 31°
10° x 40°, 12° x 60°, 14° x 100°, 30° x 60°

Luminous Flux

1866 lm

Light Source

6 LED(s)

Control

0 - 10 V, IOT, DALI, DMX

Input Voltage

Power supply: internal | 100 - 240, 277 VAC (50 - 60 Hz) | 127 - 431 VDC

Power Consumption

Max. 45 W

Storage Temperatur

-40 °C / +80 °C | -40 °F / +176 °F

Operating Temperature

-40 °C / +40 °C | -40 °F / +104 °F

Start-up Temperature

-25 °C / +40 °C | -13 °F / +104 °F

Housing Color(s)



DB703 pow
dercoated



White powd
ercoated



Black powd
ercoated



Custom
Color RAL

Ingress Protection

IP66

Environment




outdoor

Certification



Beam Angles

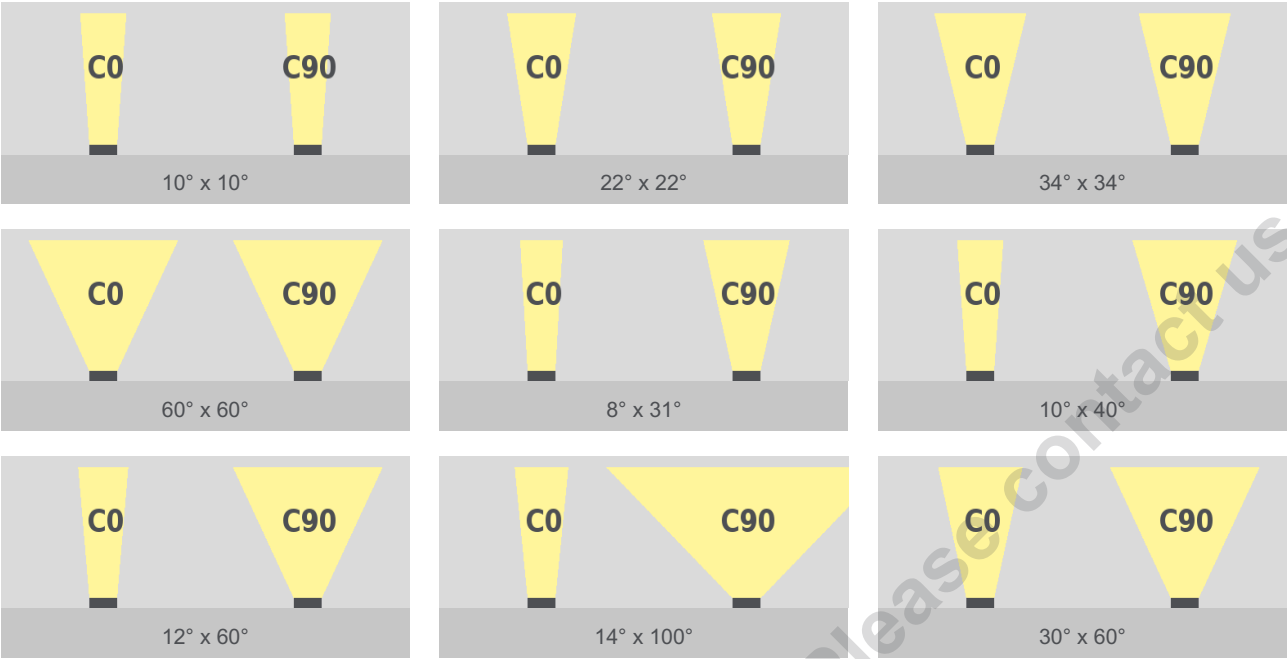

Product will be discontinued! Please contact us

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your needs and write its corresponding code on the appropriate line to form the product code.

DIS-M- _____ - _____ - _____ - _____ - Y01

TYP - LUMINOUS
COLOR

DIMMING

BEAM ANGLE

WIRING

HOUSING COLOR

TYP - LUMINOUS COLOR	
RGBW40	RGBW - 4000 K
RGBW65	RGBW - 6500 K

BEAM ANGLE	
10X10	10° x 10°
22X22	22° x 22°
34X34	34° x 34°
60X60	60° x 60°
8X31	8° x 31°
10X40	10° x 40°
12X60	12° x 60°
14X100	14° x 100°
30X60	30° x 60°

DIMMING	
NDIM	Non-dimmable
0-10V	Dimmable - 0-10V
IOT	Dimmable - IOT
DALI	Dimmable - DALI
DMX	Dimmable - DMX

WIRING	
CE	Europe
ETL	North America

HOUSING COLOR	
DB	DB703 powdercoated
WH	White powdercoated
BL	Black powdercoated
RAL____	Custom Color RAL

* Project-specific options are available - Please contact our Sales Representative for further information.



Lindberghstrasse 15
86343 Koenigsbrunn
Tel: +49 (0)8231/95787-0
Fax: +49 (0)8231/95787-29
www.biontechnologies.com
info@biontechnologies.com

YouTube: <http://www.youtube.com/user/BIONTECHNOLOGIES>

© 2020, BION TECHNOLOGIS GMBH
All rights reserved / Subject to change / Specifications may change without notice