





linea m eco
tunableWhite

TECHNICAL DATASHEET

linea m eco









tunableWhite

Technical Data


Dimensions	75 mm x 71 mm [W x H] 2.95 in x 2.80 in [W x H]
Standard Unit Lengths	629 mm, 934 mm, 1239 mm 24.77 in, 36.78 in, 48.78 in
Fixture Typ	 tunableWhite
Color Temperatures tunableWhite	2700 K - 6500 K
Beam Angles	8°, 10°, 23°, 43°, 8° x 31° 10° x 42°, 12° x 60°, 14° x 100°, 30° x 60°, 60° x 30°
Luminous Flux	629 mm (24.77 in): 1752 lm 934 mm (36.78 in): 2628 lm 1239 mm (48.78 in): 3504 lm
Light Source	629 mm (24.77 in): 16 LEDs 934 mm (36.78 in): 24 LEDs 1239 mm (48.78 in): 32 LEDs
Antiglare	optional: <ul style="list-style-type: none">▪ Hex louver (internal)▪ Linear louver (internal)
LED-Binning	
MacAdam Ellipses Binning	3
Control	DMX, 0 - 10 V, DALI

Input Voltage	Power supply: internal 100 - 240, 277 VAC (50 - 60 Hz) 127 - 431 VDC		
Power Consumption	629 mm (24.77 in):	Max. 28 W	
	934 mm (36.78 in):	Max. 42 W	
	1239 mm (48.78 in):	Max. 56 W	
Power Factor Correction	629 mm, 934 mm, 1239 mm (24.77 in, 36.78 in, 48.78 in):		
	>= 0,97 @ 110 VAC (max. Output)		
	>= 0,95 @ 230 VAC (max. Output)		
	>= 0,92 @ 277 VAC (max. Output)		
Protection Class	I		
Inrush	629 mm (24.77 in):		
	50 A 210 µs 50% peak @ 230 VAC		
	934 mm, 1239 mm (36.78 in, 48.78 in):		
	55 A 270 µs 50% peak @ 230 VAC		
Storage Temperatur	-40 °C / +80 °C -40 °F / +176 °F		
Operating Temperature	-40 °C / +40 °C -40 °F / +104 °F		
Start-up Temperature	-25 °C / +40 °C -13 °F / +104 °F		
Lumen Maintenance [L70]	65'000 h @ 25 °C (77 °F) 40'000 h @ 40 °C (104 °F)		
LED-Class	Class 2 LED-Product		
Housing	Aluminium		
Housing Color(s)			
	Aluminium anodized (Standard)	Black anodized	
Lens	Tempered safety glass, extra white		
Weight	617 mm / 24.30 in:	5 kg	(11.02 lbs)
	922 mm / 36.30 in:	7 kg	(15.43 lbs)
	1228 mm / 48.35 in:	9 kg	(19.84 lbs)
Ingress Protection	IP66		
Environment			
	indoor	outdoor	
Impact Protection	IK07		
Certification			

Beam Angles

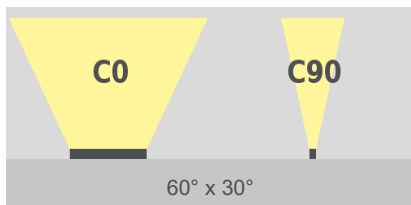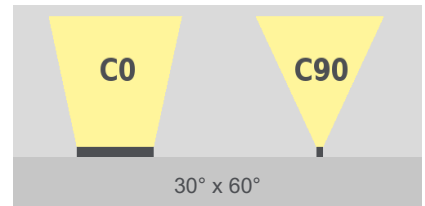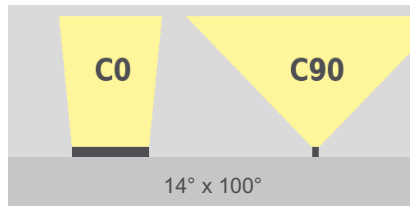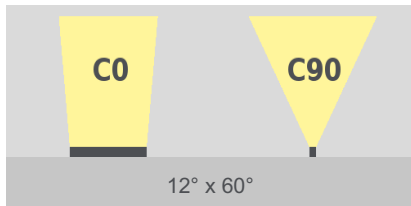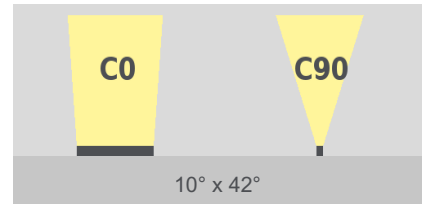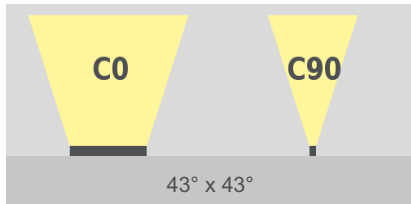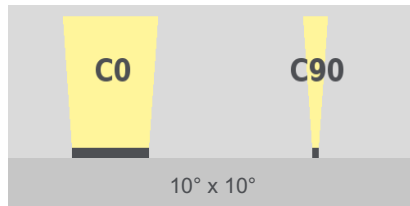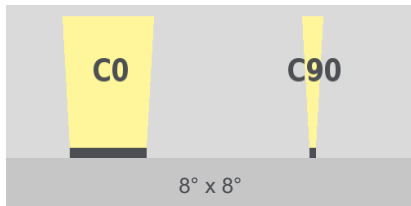

Engineering Drawing

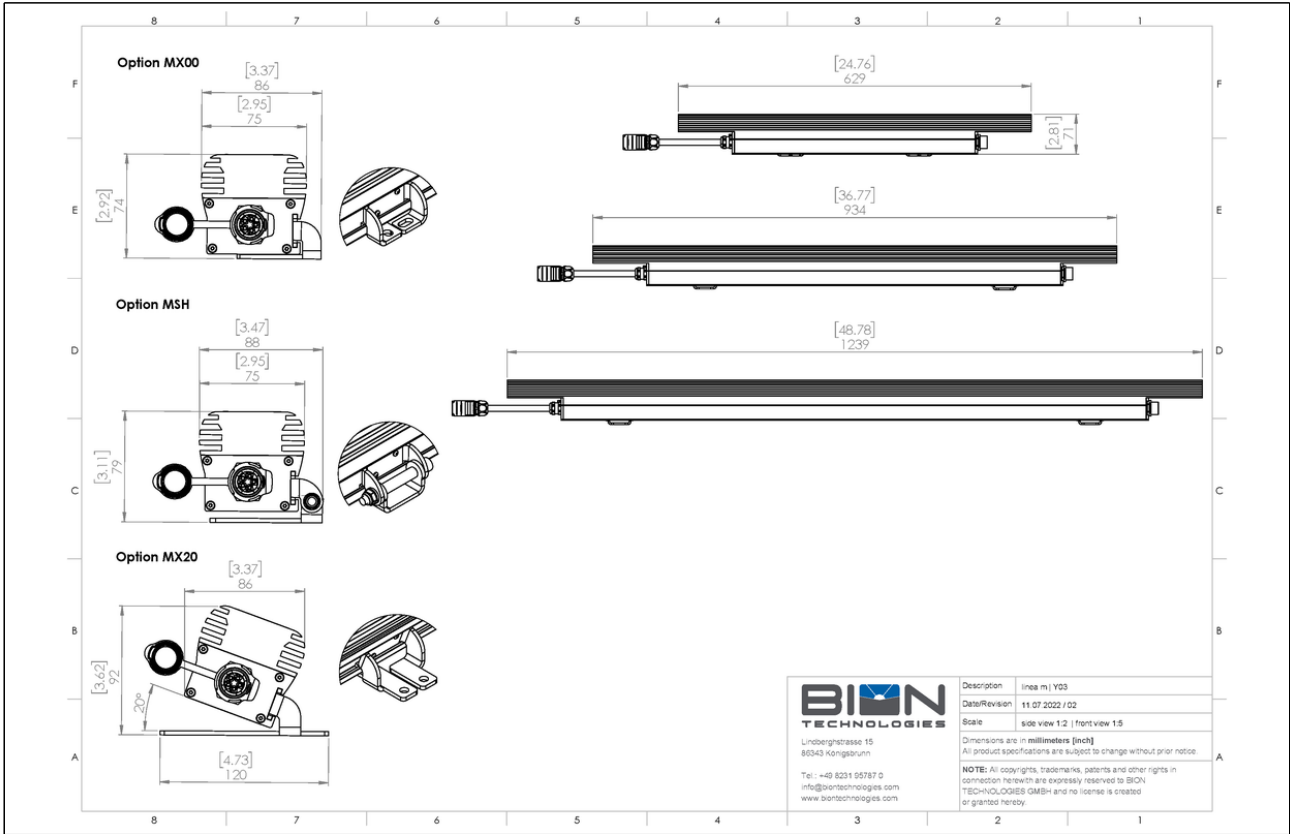

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your needs and write its corresponding code on the appropriate line to form the product code.

LIN-M-ECO- TW2765 - - - - - Y03

TYP - LUMINOUS COLOR		DIMMING	FIXTURE LENGTH	BEAM ANGLE	WIRING	HOUSING COLOR	POSITION LEADER CABLE	LEADERCABLE LENGTH	GLARE PROTECTION	MOUNTING OPTION	
TYP - LUMINOUS COLOR TW2765 tunableWhite - 2700 K - 6500 K		BEAM ANGLE 8X8 8° x 8° 10X10 10° x 10° 23X23 23° x 23° 43X43 43° x 43° 8X31 8° x 31° 10X42 10° x 42° 12X60 12° x 60° 14X100 14° x 100° 30X60 30° x 60° 60X30 60° x 30°		POSITION LEADER CABLE L Left R Right		LEADERCABLE LENGTH ETE End to end - wiring 003 + 30 cm (ca. 1 ft) 006 + 60 cm (ca. 2 ft) 009 + 90 cm (ca. 3 ft) 012 + 1,2 m (ca. 4 ft)		GLARE PROTECTION OP No glare protection HL Hex louver (internal) LLO Linear louver (internal)		MOUNTING OPTION MX00 Mounting bracket Fix 0° MX20 Mounting bracket Fix 20° MSH Mounting Set Hinge	
DIMMING DMX Dimmable - DMX 0-10V Dimmable - 0-10V DALI Dimmable - DALI		WIRING CE Europe ETL North America		HOUSING COLOR AA Aluminium anodized (Standard) BA Black anodized							
FIXTURE LENGTH 629 629 mm / 24.76 in 934 934 mm / 36.77 in 1239 1239 mm / 48.78 in											

Sample Order Code: linea-m-eco-out-tw3060-dim-DMX-2/617-12x60-AA-Y01

* Project-specific options are available - Please contact our Sales Representative for further information.



Lindberghstrasse 15
86343 Koenigsbrunn
Tel: +49 (0)8231/95787-0
Fax: +49 (0)8231/95787-29
www.biontechnologies.com
info@biontechnologies.com

YouTube: <http://www.youtube.com/user/BIONTECHNOLOGIES>

© 2024, BION TECHNOLOGIS GMBH
All rights reserved / Subject to change / Specifications may change without notice