


tellus m installation housing

The recessed floor housing, made of high-quality aluminum extrusion profile (EN AW 6060), features an anodized finish and offers a durable solution for indoor and outdoor use. Specifically designed for the **tellus m** and **tellus point** recessed floor lights, it allows for flexible installation in various lengths – perfect for any project.

Dimensions

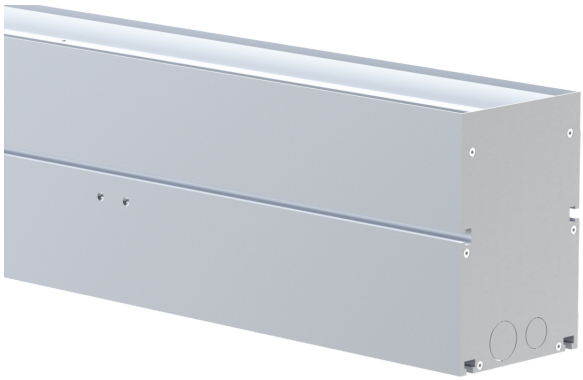

Metric:
115 mm, 225 mm, 273 mm, 350 mm, 655 mm, 960 mm, 1265 mm (X)
114 mm (Y)
170 mm (Z)

Imperial
4.53 in, 8.86 in, 10.75 in, 13.78 in, 25.79 in, 37.80 in, 49.81 in (X)
4.49 Inch (Y)
6.70 Inch (Z)

Technical Data

Material	Aluminum extruded profile (EN AW 6060)
Housing Color	Aluminium anodized
Load	500 kg | 1103 lb
Environment	Indoor, Outdoor
Approbation	CE, ETL
Weight	350 mm | 13.78 in → 2.1 kg | 4.7 lb 655 mm | 25.79 in → 3.8 kg | 8.4 lb 960 mm | 37.80 in → 5.5 kg | 12.2 lb 1265 mm | 49.81 in → 7.2 kg | 15.9 lb The weight of the fixture can vary depending on the configuration!
	Designed and Developed in Bavaria. Made in Germany.

Accessories



Gel-filled cable joint

sales@biontechnologies.com
www.biontechnologies.com

Phone:
(DE) +49 8231 95787 0

All information without guarantee. Errors, changes and misprints excepted.

tellus m installation housing

Configurator

TEL-M-INBX -(1)_____-Y02

1 Dimension	
115	115 mm / 4.53 in
225	225 mm / 8.86 in
273	273 mm / 10.75 in
350	350 mm / 13.78 in
655	655 mm / 25.79 in
960	960 mm / 37.80 in
1265	1265 mm / 49.80 in

sales@biontechnologies.com
www.biontechnologies.com
Phone:
(DE) +49 8231 95787 0

All information without guarantee. Errors, changes and misprints excepted.